



XDS-2288

22" Interactive Smart Kiosk

Part of the IAdea Smart Workplace series — Robust design & commercial functionality



Wide ViewAngle

250 nits brightness for the best visual experience, even from a distance



Orientation Aware

Easy to integrate into workplace design in portrait and landscape



Interactive Wayfinding

Easily identify destination from a far or, browse through facility directory to find the way



High Performance Processor

Powers smooth, responsive, and vibrant user experience



Digital Bulletin System

Broadcast the latest updates on corporate events, news, and facility information



10-Point Multi-Touch

Quick check-in/out or book room at-the-door. Zoom and scroll for easy browsing



Tempered Glass

An anti-scratch display that withstands strenuous interactive applications




Remote Device Management

Easily manage, monitor & troubleshoot all in-service room panels

IAdea XDS-2288 A powerful touch display to drive office productivity and efficiency

Wide view angle IPS display

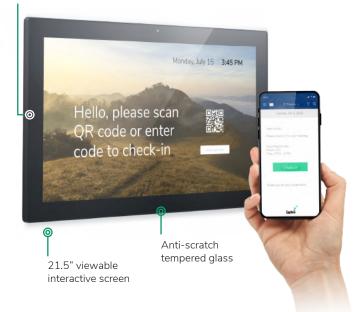

Superior Interactivity for Incredible Visitor Experience Arrive. Check-in. Meet.

IAdea Smart Kiosks eliminates the hassle of queuing for receptionists. Visitors can quickly check-in for their meeting by keying in a unique code on-screen or on mobile to notify the host of their arrival. IAdea Smart Kiosk can integrate with scanners, printers, and peripherals to deploy a variety of self-service visitor authentication and identification processes.

Navigate Facility with Confidence

Interactive wayfinding is transforming today's workplace. The convenience of browsing through floor maps and facility information creates a pleasant and efficient environment for both visitors and employees. One of the most significant benefits of deploying digital wayfinding system in the workplace is that occupants always have access to the latest space occupancy status, which drives work productivity and experience.





An Intelligent Kiosk Suitable for Every Smart Workplace

Versatility is IAdea Smart Kiosk's speciality. Whether the office needs self-service visitor check-in, interactive wayfinding, eye-catching welcome message or meeting information signage, it does it all. The panel can rotate between portrait and landscape positioning to maximize the presentation of the displayed content and comes with a range of mounting options to integrate with any office architecture.

Universal I/O Port for Extension



Deploy and Manage Direct from the Cloud



I_AdeaCare

Room finder



IAdeaCare: Remote Device Management Service

IAdeaCare is a cloud-based device management service that enables you to securely deploy, manage, and monitor all the IAdea devices in your care, anytime, anywhere, through a standard web browser.

Deploy IAdea Smart Kiosk in Style



Table Stand







Tilt Mount

Technical Specifications

Display

- 21.5" IPS LCD panel
- 10 points capacitive multi-touch
- 250 nits maximum brightness
- 1920 x 1080 (Full HD) panel resolution
- Viewing angle (H/V): 178/178

Internal Player

- Processor: Cortex-A17 1.8 GHz Quad-Core
- System memory: 2.0 GB
- Flash memory: 8 GB eMMC built-in

Video Format Supported

- H.264/AVC up to 1080p (1920 x 1080)
- H.265/AVC up to 1080p (1920 x 1080)
- MPEG-4 up to 1080p (1920 x 1080)
- MPEG-2 up to 1080p (1920 x 1080)
- MPEG-1 up to 1080p (1920 x 1080)
- VC-1 up to 1080p (1920 x 1080)

Image Format Supported

- JPEG up to 1920 x 1080
- PNG up to 1920 x 1080

Audio Format Supported

• MP3 up to 320 Kbps

Content Management

- SignApps Express utility
- 3rd party solution (optional license)

Open Standards Supported

- HTML5, JavaScript, and CSS
- W3C SMIL for cross-platform management
- W3C widgets for HTML delivery
- Android 7.1 API

HTML5 Support

- Widgets for calendar, clock, news, and web page integration
- HTML5 technologies including CSS and Javascript
- Chromium-based browser engine, same as Google Chrome™

Advanced Signage Features

- Remote commissioning
- AlwaysOn, AppLock to prevent unauthorized access
- StrongCache for continuous playback even when network is not available
- Multi-zone screen layout, transparent PNG overlay, and graphical scrolling ticker
- Auto-play starts playing scheduled contents automatically when power is re-established
- Automatic error recovery with built-in WDT
- Real-time clock with backup clock battery

Connectivity

- Front camera: 2MP
- Wi-Fi: 802.11 b/g/n
- Mini USB for ADB (Android Debug Bridge)
- Ethernet RJ45
- USB 2.0 x 3
- Built-in stereo speakers 2 W x 2
- 3.5 mm analog stereo audio out
 SD card slot, memory expendable to 16 GB / 32 GB / 64 GB (card replaces internal storage)

Mounting Options

Built-in VESA MIS-D 100 mm x 100 mm mounting points

Supplied Accessories

- Power adapter
- Power cord
- I/O bracket
- Quick guide

Optional Accessories

• Adjustable table stand (PVK-302)

Power Requirement

- Input: AC 100 240 V, 50 60 Hz, 1.5 A max
- Output: 12 V / 3 A
- UL/CB certified power supplies

Environmental

- Operating temperature: 0 to 40 °C
- Humidity: 10 to 85 % @ 45 °C, non-condensing

Dimensions for Product & Package

- System dimension: 538 mm x 331 mm x 37 mm (21.18" x 13.03" x 1.46")
- System weight: 3.83 kg (8.44 lbs)
- Package weight: 5.8 kg (12.78 lbs)

Certifications

• CE / FCC / RoHS

Warranty

 1-year limited parts & labor* (varies based on region, contact sales for more details)



America

20 Fairbanks, Ste, 170 Irvine, CA 92618 California, U.S.A Tel: +1-949-305-6489 Email: US-Sales@IAdea.com

Taiwan

114, 3F, No. 21 Ln. 168, Xingshan Rd. Neihu Dist., Taipei, Taiwan Tel: +886-2-2791-1110 Fax:+886-2-2791-1170 Email: Sales@IAdea.com

